


PROJECT INFORMATION

PROJECT ADDRESS
BRICK BREEDEN FIELDHOUSE, ROOM 138
1 BOBCAT CIRCLE
BOZEMAN, MT 59717

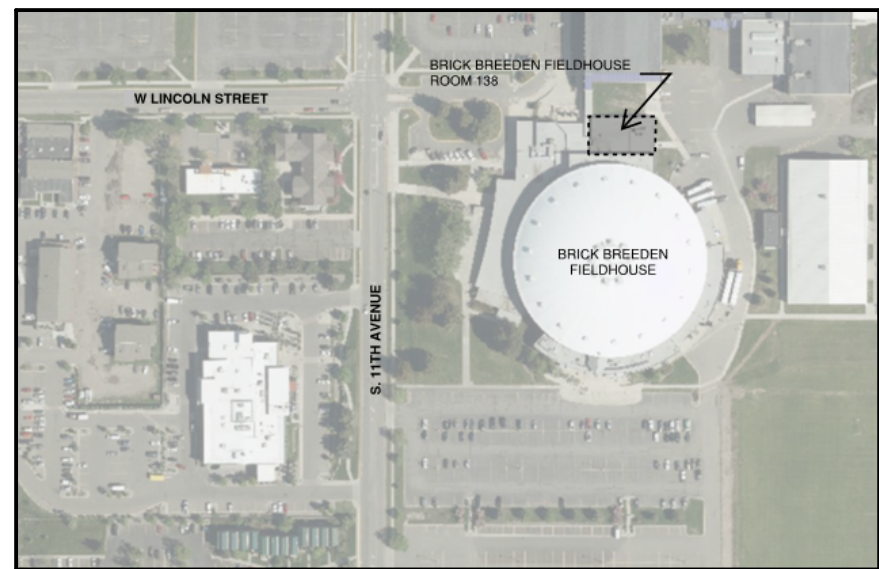

PROJECT DESCRIPTION
DEMOLITION OF EXISTING RESILIENT FLOORING IN WEIGHT ROOM, ROOM 138.
INSTALLATION OF NEW RESILIENT FLOORING IN WEIGHT ROOM, ROOM 138.

OWNER
MONTANA STATE UNIVERSITY
BOZEMAN, MT 59717
CONTACT: SHAWN LONG
SHAWN.LONG@MONTANA.EDU
(406) 581-6846

GENERAL NOTES


1. FIELD VERIFY ALL EXISTING CONDITIONS AND SCOPE OF THESE DRAWINGS PRIOR TO SUBMITTAL OF BID AND NOTIFY MSU OWNER CONTACT IMMEDIATELY IN WRITING OF ANY DISCREPANCIES.
2. RELOCATION OF EXISTING FIXTURES, FURNISHINGS, AND EQUIPMENT IN AREA OF PROJECT IS NOT PART OF THE SCOPE OF WORK.
3. CONTRACTOR IS RESPONSIBLE FOR LEGAL DISPOSAL OF ALL WASTE FROM DEMOLITION AND NEW CONSTRUCTION. DISPOSAL OF WASTE IS NOT ALLOWED IN MSU RECEPTACLES.
4. BUILDING WILL REMAIN OCCUPIED DURING DEMOLITION AND NEW CONSTRUCTION. CONTRACTOR TO COORDINATE CONSTRUCTION ACTIVITIES WITH THE MSU OWNER CONTACT INCLUDING BUT NOT LIMITED TO BUILDING ACCESS, DEMOLITION WASTE STORAGE AND DISPOSAL, NEW AND REUSED MATERIAL STORAGE AND STAGING, AND SO FORTH.

DEMOLITION NOTES


1. DO NOT MAKE ANY REPAIRS OR CHANGES THAT ARE NOT SHOWN ON THE DRAWINGS WITHOUT APPROVAL BY MSU'S OWNER CONTACT.
2. PROTECT ADJACENT SURFACES, INCLUDING MIRRORS, DOORS, FLOORING TO REMAIN, AND SO FORTH FROM DAMAGE DURING DEMOLITION. REPAIR ANY DAMAGE CAUSED TO ADJACENT SURFACES.
3. THE DRAWINGS INDICATE THE OBVIOUS EXTENT OF NECESSARY DEMOLITION. THE ACTUAL AMOUNT OF DEMOLITION AND RECONSTRUCTION WILL BE DETERMINED BY HOW THE DEMOLITION WORK IS PERFORMED. THE DEMOLITION PROCESS MAY HAVE A GREATER IMPACT ON ADJACENT AREAS OF THE BUILDING TO REMAIN THAN INDICATED ON THE DRAWINGS. THE CONTRACTOR IS TO REASONABLY VERIFY THE IMPACTS THAT THE DEMOLITION PROCESS WILL HAVE ON ADJACENT EXISTING CONDITIONS.

NEW CONSTRUCTION NOTES

1. DO NOT SCALE DRAWINGS FOR DIMENSIONAL INFORMATION; ALL ELEMENTS ON THE DRAWINGS MAY NOT BE TO THE EXACT SCALE. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO START OF WORK.
2. SUBMIT TO THE MSU OWNER CONTACT FOR REVIEW AND APPROVAL PRIOR TO MATERIAL PROCUREMENT AND INSTALLATION THE FOLLOWING:
 - A. MANUFACTURER'S PRODUCT DATA FOR RESILIENT FLOORING AND ASSOCIATED ACCESSORIES
 - B. SHOP DRAWINGS FOR RESILIENT FLOORING AND ASSOCIATED ACCESSORIES SHOWING INSTALLATION DETAILS, FLOOR PATTERNS, AND SEAM LOCATIONS.
 - C. SAMPLES OF RESILIENT FLOORING IN SPECIFIED COLOR AND FINISH.
 - D. SAMPLES OF RUBBER BASE IN MATCHING COLOR AND FINISH IF EXISTING BASE CANNOT BE SALVAGED AND ADDITIONAL STOCK IS REQUIRED.
3. SUBMIT TO THE MSU OWNER CONTACT PRIOR TO THE COMPLETION OF THE PROJECT THE FOLLOWING:
 - A. MANUFACTURER'S MAINTENANCE DATA FOR THE RESILIENT FLOORING.
 - B. MANUFACTURER'S STANDARD WARRANTY.
4. PROTECT ADJACENT SURFACES FROM DAMAGE DURING CONSTRUCTION. REPAIR ANY DAMAGE CAUSED TO ADJACENT SURFACES.
5. PREPARE SUBFLOOR UNDER DEMOLISHED RESILIENT FLOORING FOR INSTALLATION OF NEW RESILIENT FLOORING TO MANUFACTURER'S SPECIFICATIONS.
6. INSTALL NEW RESILIENT FLOORING PER MANUFACTURER'S SPECIFICATIONS.
 - A. SWEEP, VACUUM CLEAN SUBSTRATES TO BE COVERED BY FLOORING IMMEDIATELY BEFORE INSTALLATION.
 - B. SCRIBE, CUT, AND FIT FLOORING TO BUTT NEATLY AND TIGHTLY TO VERTICAL SURFACES, EQUIPMENT ANCHORS, FLOOR OUTLETS, AND OTHER INTERRUPTIONS OF FLOOR SURFACE.
 - C. EXTEND FLOORING INTO TOE SPACES, DOOR REVEALS, CLOSETS, AND SIMILAR OPENINGS UNLESS OTHERWISE INDICATED.
 - D. ADHERE TO SUBSTRATE WITH ADHESIVE APPROVED FOR USE BY FLOORING MANUFACTURER.
7. INSTALL NEW RUBBER BASE AND FLOOR TRANSITION STRIPS TO MATCH PREVIOUSLY INSTALLED CONDITIONS. INSTALL NEW RUBBER FLOORING TRANSITION STRIPS AT CHANGES IN FLOOR MATERIAL OR TRANSITIONING BETWEEN TWO SURFACE THICKNESSES, TYPICAL. TRANSITION STRIPS TO BE ADA-COMPLIANT IF TRANSITION BETWEEN TWO SURFACES OF DIFFERENT THICKNESSES.

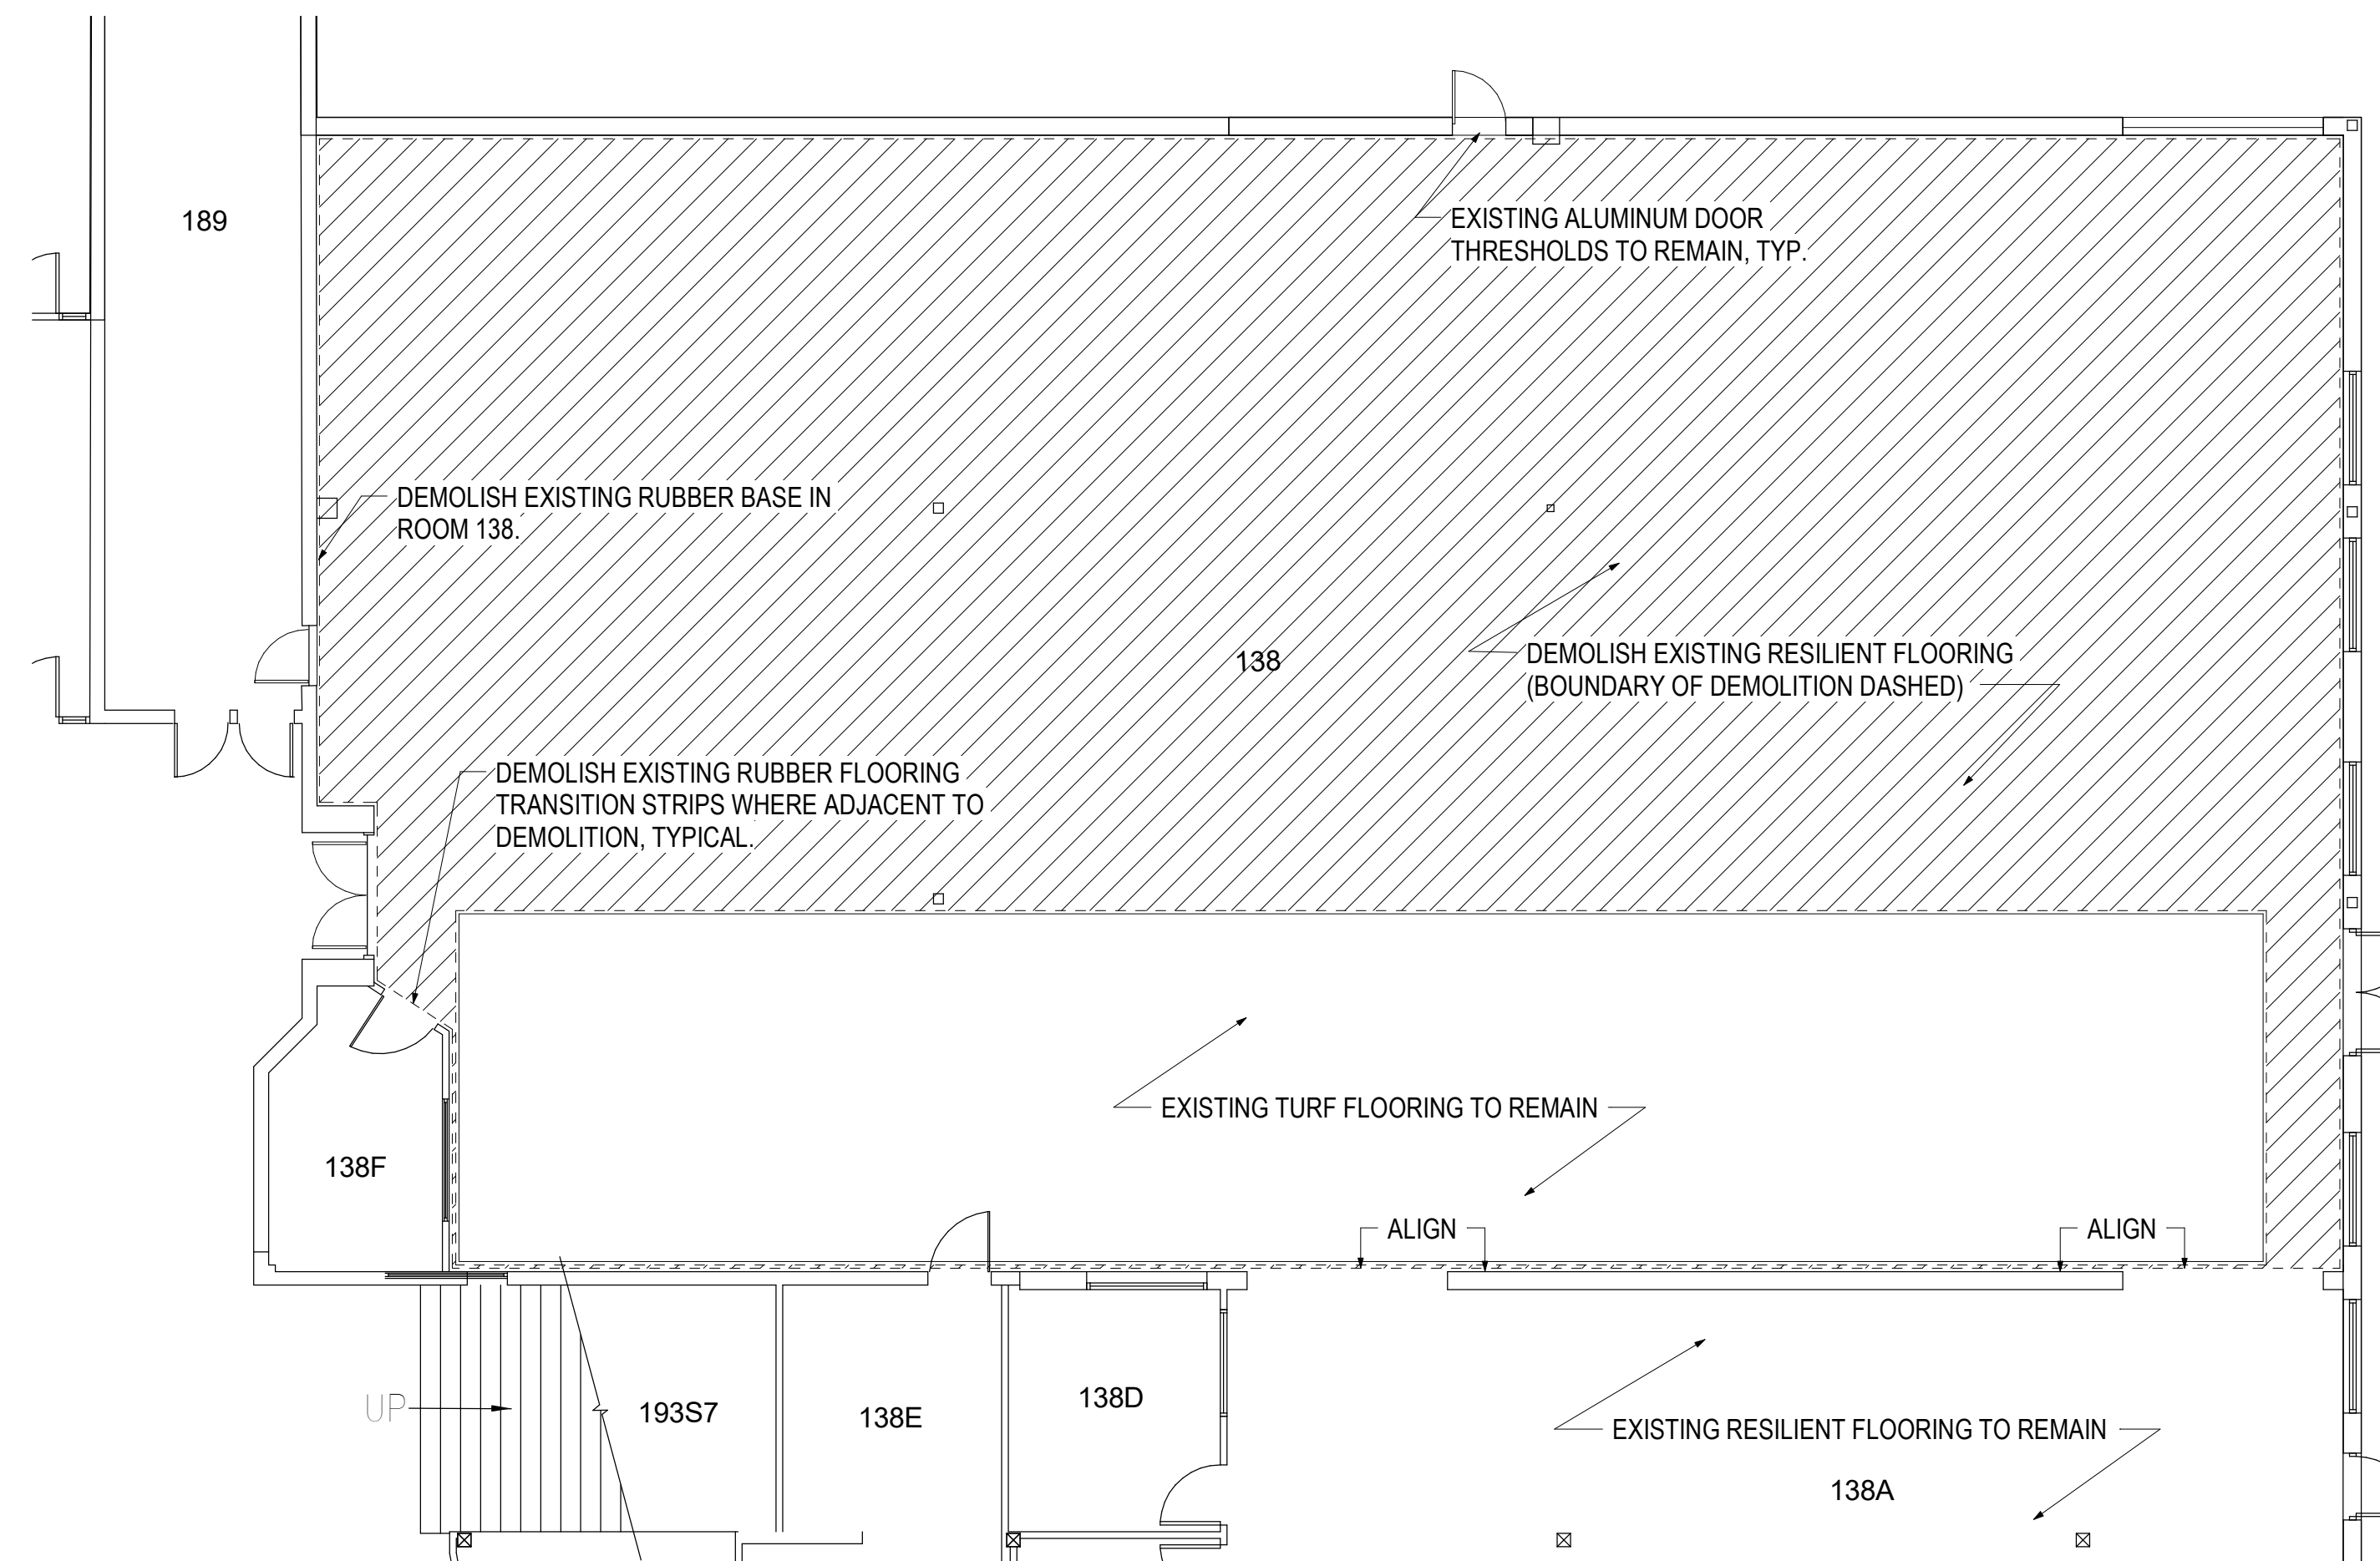

1 PLAN, DEMOLITION - LEVEL 1
1/8" = 1'-0"

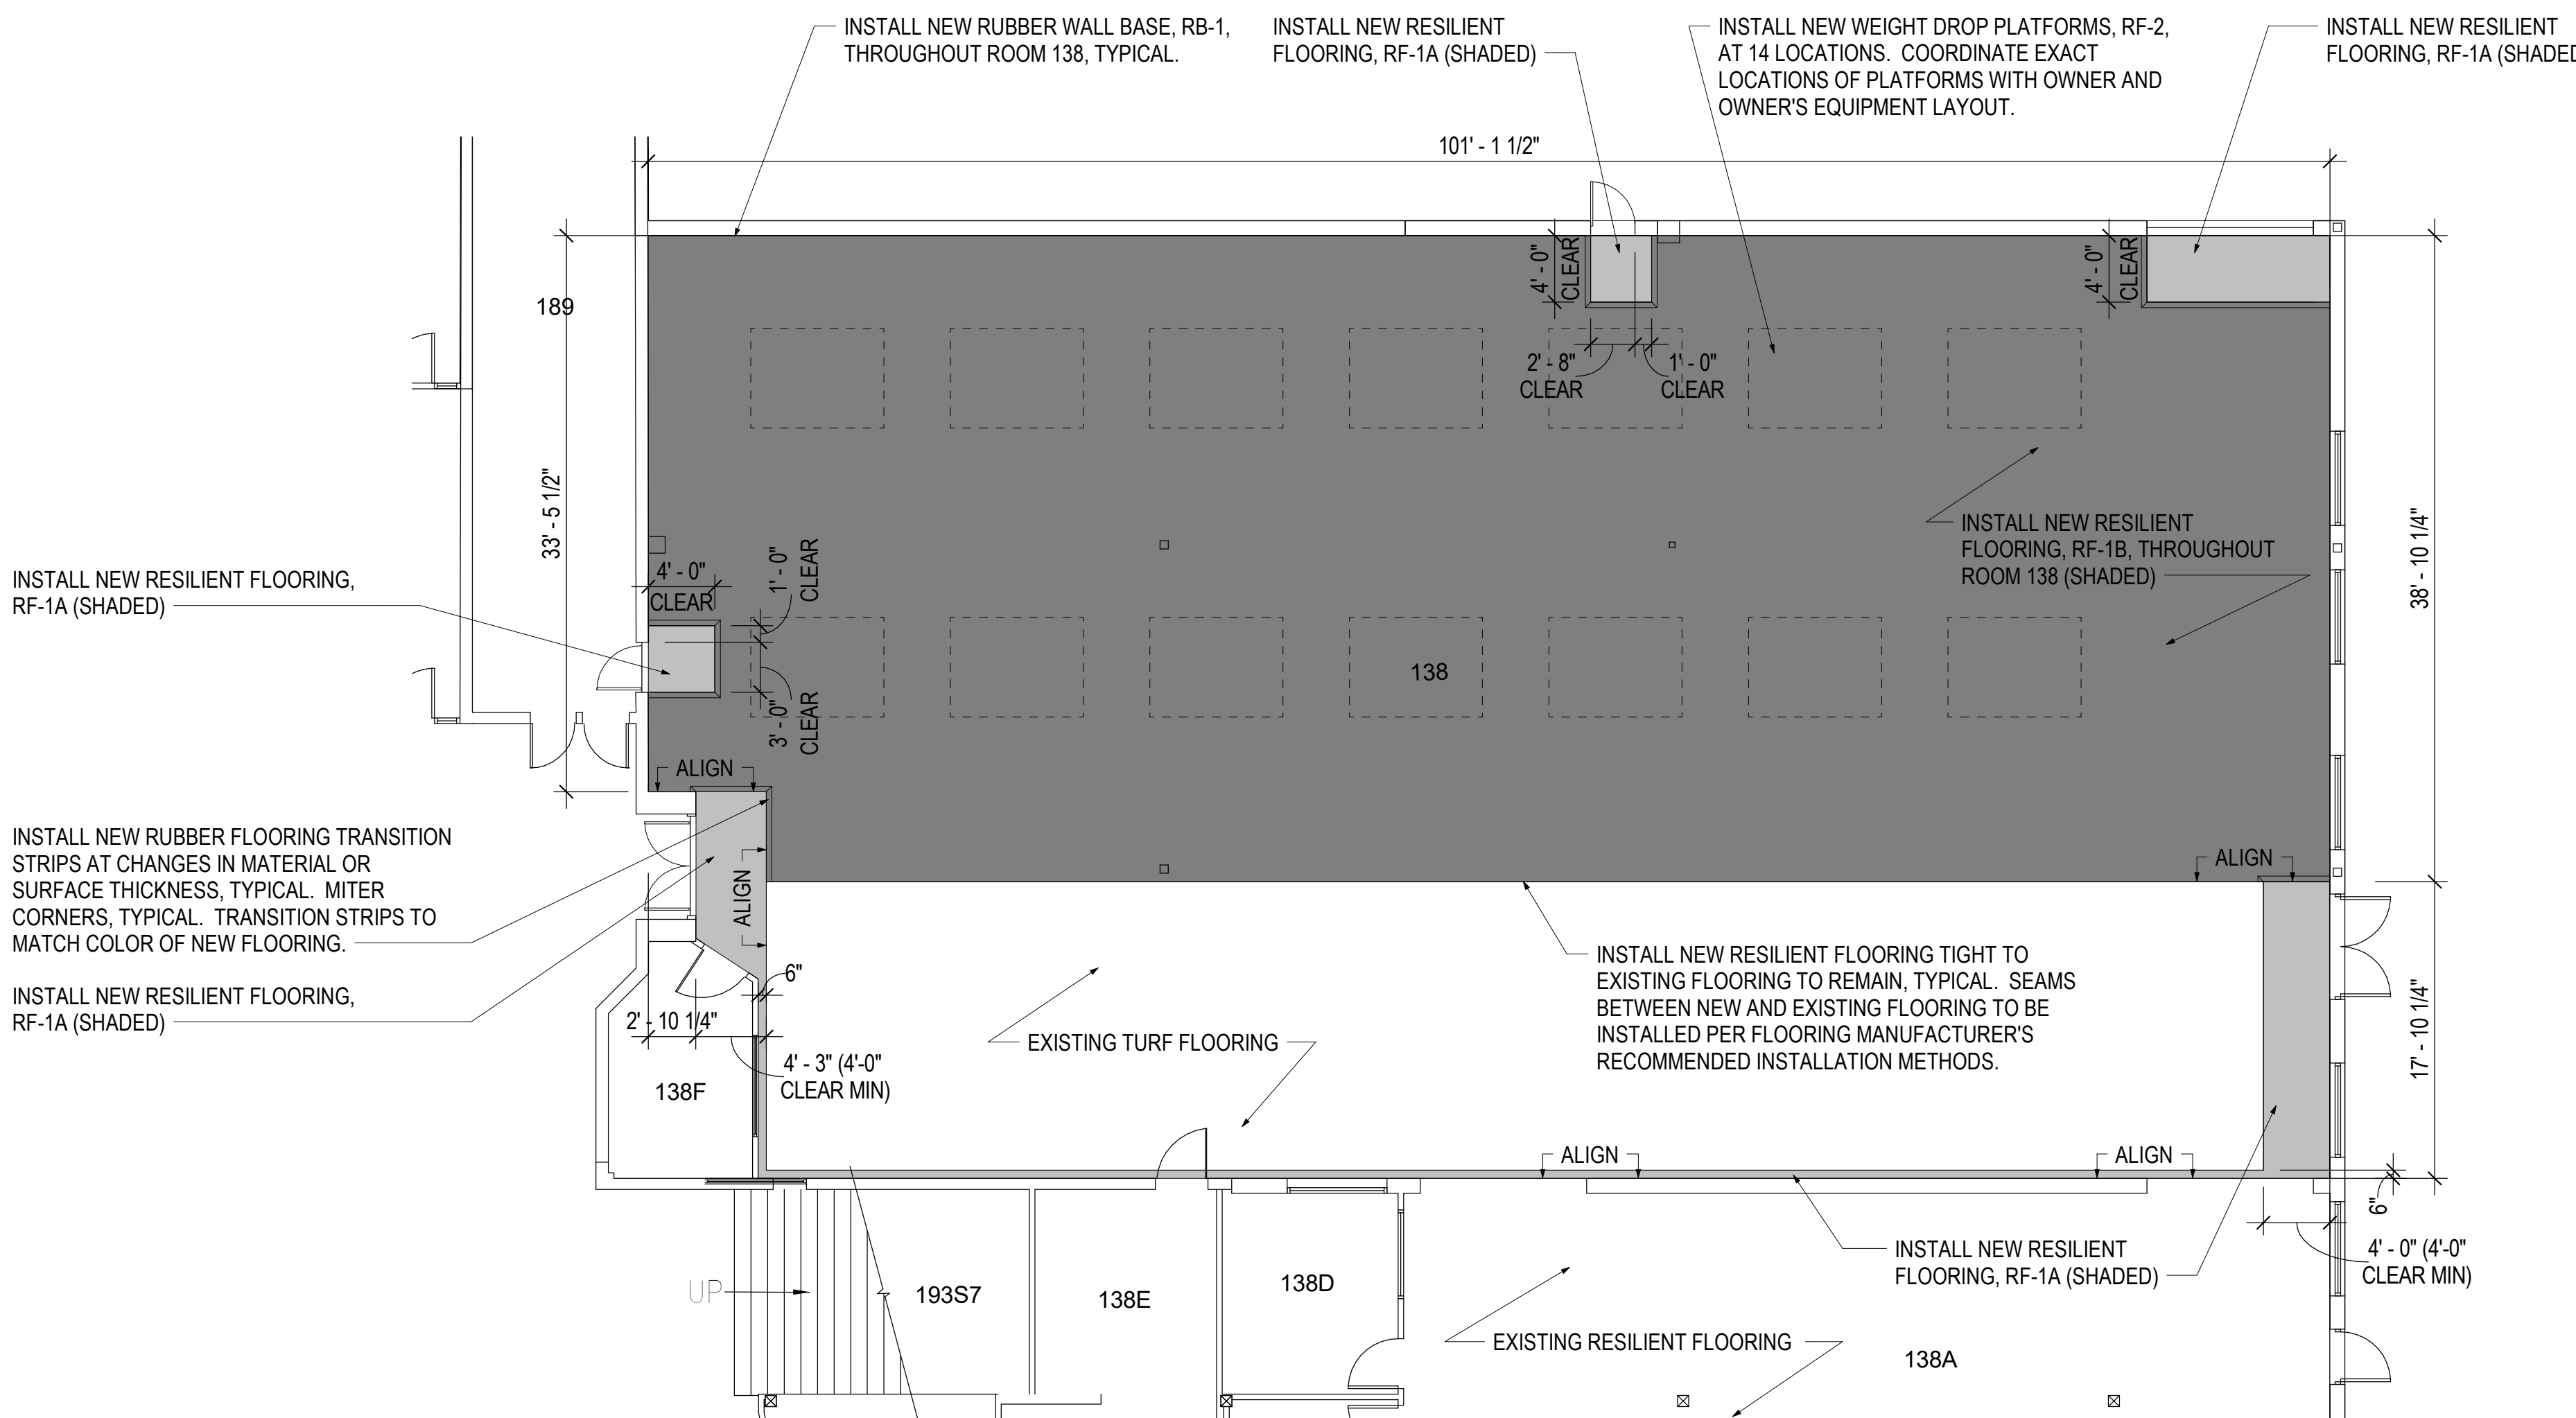

2 PLAN, FLOOR - LEVEL 1
1/8" = 1'-0"

FINISH LEGEND

RF	RESILIENT FLOORING	RB	RUBBER BASE
RF-1	MANUFACTURER PRODUCT COLOR SIZE ACCESSORIES	PLAE ACHIEVE ARTEMIS GRAY 8MM THICK (RF-1A) ■, 18MM THICK (RF-1B) ■ LOW-VOC ADHESIVE APPROVED FOR USE BY FLOORING MANUFACTURER FOR RESILIENT FLOORING PRODUCT AND SUBSTRATE. RUBBER FLOORING TRANSITION STRIPS BY TARKETT OR SIMILAR. COLOR TO MATCH FLOORING.	MANUFACTURER JOHNSONITE OR SIMILAR
RF-2	MANUFACTURER PRODUCT COLOR SIZE ACCESSORIES NOTES	PLAE APLAT - 810 OLYMPIC PLAT LOGO CHARCOAL WITH WATER JET LOGO BLACK BUMPERS 18MM THICK 6'-0" X 8'-0" WITH 4'-0" X 6'-0" COLOR AND LOGO LOW-VOC ADHESIVE APPROVED FOR USE BY FLOORING MANUFACTURER FOR RESILIENT FLOORING PRODUCT AND SUBSTRATE. GRAPHIC LOGO VECTOR FILE TO BE PROVIDED BY OWNER TO CONTRACTOR.	MANUFACTURER MATCH EXISTING MATCH EXISTING MATCH EXISTING LOW-VOC ADHESIVE APPROVED FOR USE BY BASE MANUFACTURER BASE AND SUBSTRATE.

BBFH Weight
Room Flooring
Replacement

1 BOBCAT CIRCLE
BOZEMAN, MT 59717

NOTES AND
PLANS